## Dock Lights SPECIFICATION





An illuminated truck trailer allows your employees to safely load and unload quickly and efficiently! Now you can improve poor lighting and ventilation at your dock. The APS Resource Metal or Poly Head Dock Light, Spring Head Dock Light and Dock Light/Fan combinations are the solution. Lights are powder coated in safety yellow finish for high visibility. Many Dock Light models are dual arm construction for greater durability and flexibility. Now available with energy saving LED technology.

## **Design Highlights**

- Available with 24", 42", 62" or 90" total arm reach
- Available with metal or polycarbonate head
- Optional LED, High Pressure Sodium, Metal Halide Bulbs or incandescent bulbs
- Rugged Spring-Head adds additional durability
- Light/Fan combination has 3-speed, 18" 5500 CFM fan
- UL listed and cUL listed

**Droject Information** 

• APS Resource warrants these products will be free from defects in material and workmanship under normal use for (1) year


r roject illiorillation
Job Name
Address
General Contractor
Distributor
Model
Quantity
<b>Certified For Construction</b>
Ву
Company
Address
Date



## Dock Lights SPECIFICATION

Models	Total Reach	# of Arm Segments	Application	Est. Weight
Metal Heads				
K-1024	24"	2	Trucks	16 lbs.
K-1040	42"	2	Trucks	18 lbs.
K-1040 (spring head)	42"	2	Trucks	18 lbs.
K-1060	62"	3	Trucks/Rails	23 lbs.
K-1090	90"	5	Rail Cars	25 lbs.
Polycarbonate Heads				
DL-40P	42"	2	Trucks	15 lbs.
DL-40P (spring head)	42"	2	Trucks	15 lbs.
DL-60P	62"	3	Trucks/Rails	20 lbs.
DL-60P (spring head)	62"	3	Trucks/Rails	20 lbs.
High Pressure Sodium (bulb included)				
K-1040-HPS-50W (metal head)	42"	2	Food/Pharm.	27 lbs.
DL-40P-HPS-50W (poly head)	42"	2	Food/Pharm.	25 lbs.
K-1060-HPS-50W (metal head)	62"	3	Food/Pharm.	32 lbs.
DL-60P-HPS-50W (poly head)	62"	3	Food/Pharm.	30 lbs.
Light/Fan Combo				
K-1040-LF (metal head)	42"	2	Trucks	45 lbs.
DL-40P-LF (poly head)	42"	2	Trucks	38 lbs.
K-1060-LF (metal head)	62"	3	Trucks/Rails	49 lbs.
DL-60P-LF (poly head)	62"	3	Trucks/Rails	43 lbs.

\* 115 volt is standard. Lamp bulb not included unless indicated. Metal halide, quartz halogen and fluorescent heads are also available. Consult APS for details.

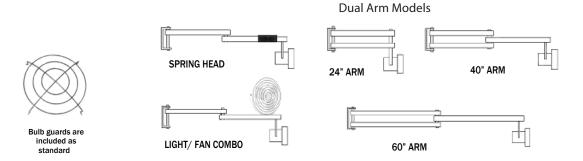

Note: Bottom of dock light arm to be mounted a minimum of 6'9" above floor level.

